

Rating	20A 14VDC	<p>Thickness:0.7~3.0</p>	
Contact Resistance	50m ohm Max.		
Insulation Resistance	DC 500V 100M ohm Min.		
Dielectric Strength	AC 1000V 1 minute		
Operation Temperature	-25° C~85° C		
Switch Function	5P SPDT OFF-ON-ON(LED Independent)		

**Material:**

Frame: Black, Nylon 66 (94-V2)







Actuator: Black, Nylon 66 (94-V2)

Lens: White diffuse

Terminals: Silver plated, Copper alloy

LED: Red

Hot stamping: White, 0,1,2

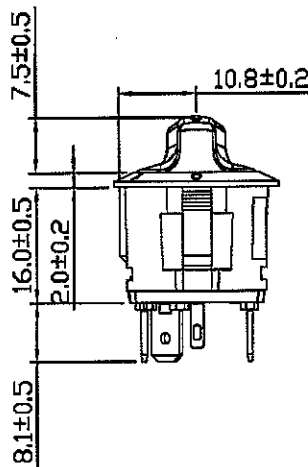

C31R13/R13-702B1-02-BBW-11R00-1\_X0

03/30/11	B.S.Wang	更正Dielectric Strength數據, 原AC 1500V 1 minute更正為AC 1000V 1 minute					
Date	Name	Description					NO
Drawn	Checked	Approved	SCI BOM No.	1940016	Model Name	ROTARY SWITCH	
B.S.Wang			Customer No.		Model No.	R13-702B1-02-BBW-11R00-1	REV.
03/30/11		3/31/11	Unit	mm			1