

A

B

C

D

E

1

2



3

4

5

6

7

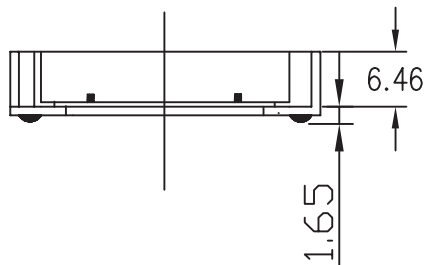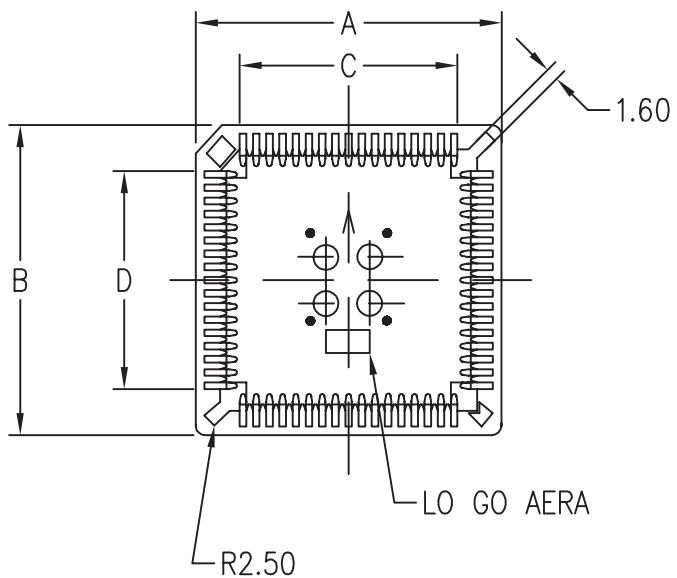

NO OF CONTACT	A±0.15	B±0.15	C±0.15	D±0.15	E±0.15	F±0.15
20PPS	15.50	15.50	5.08	5.08	5.08	5.08
28PPS	18.04	18.04	7.62	7.62	7.62	7.62
32PPS	18.04	20.54	7.62	10.16	7.62	10.16
44PPS	23.48	23.48	12.70	12.70	12.70	12.70
52PPS	25.88	25.88	15.24	15.24	15.24	15.24
68PPS	31.04	31.04	20.32	20.32	20.32	20.32
84PPS	36.04	36.04	25.40	25.40	25.40	25.40

A

B

C

D

E

Insulator Material:PPS (UL 94V-0)
Contact Resistance:30MΩ MAX at DC 100MA
Current Rating:1 AMP
Dielectric Withstanding Voltage:AC 500V For 1 minute
Temperayure Rating:-55C ~ +105C
Insulator Reslalance:1000MΩMin at DC 500V

