


| REV. | REVISIONS | DATE |
|------|-----------|------|
|------|-----------|------|

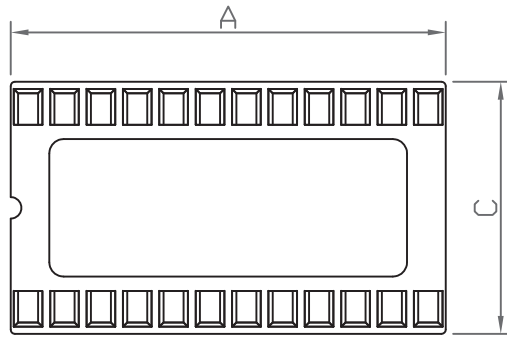

Insulator Material:PBT &30% Glass Fiber(UL 94V-0)

Contact Resistance:30MΩ at DC 100MA

Insulator Resistance:1000MΩ Min atDC 250V



Current Rating:1 AMP

Dielectric Withstanding Voltage:AC 500V For 1minute

Temperature Rating: -40°C ~ +85°C

Contract Material:Phospher Bronze

Plating:Tin plated.

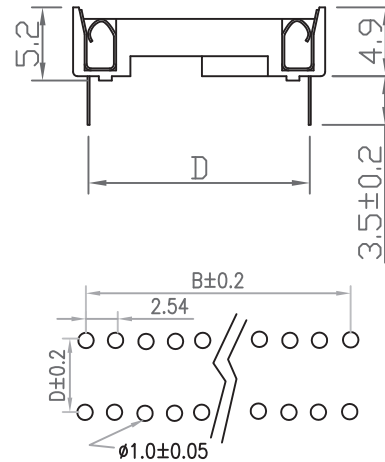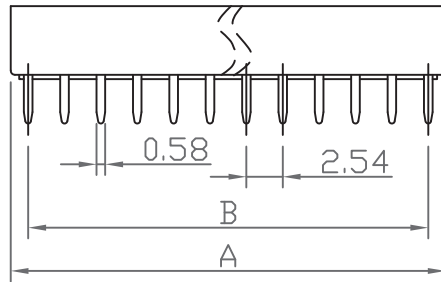

| NO. OF PINS | DIMENSIONS: (UNIT:mm±0.2) | | | |
|-------------|---------------------------|-------|-------|-------|
| | A | B | C | D |
| 6 | 7.62 | 5.08 | 9.96 | 7.62 |
| 8 | 10.16 | 7.62 | | |
| 14 | 17.78 | 15.24 | | |
| 16 | 20.32 | 17.78 | | |
| 18 | 22.86 | 20.32 | | |
| 20 | 25.40 | 22.86 | | |
| 24 | 30.48 | 27.94 | | |
| 28 | 35.56 | 33.02 | | |
| / | | | | |
| 24 | 30.48 | 27.94 | 17.60 | 15.24 |
| 28 | 35.56 | 33.02 | | |
| 32 | 40.64 | 38.10 | | |
| 40 | 50.80 | 48.26 | | |
| 42 | 53.34 | 50.80 | | |

Order Code
2 1 2 0 - x x x E

No of contacts

TYPE:

N: Space 7.62
B: Space 15.24 / W Bar
W: Space 15.24 / W/O Bar

P.C. Board Layout

| | | | | | |
|------------|--------|----------------------|----------------------------|---|------------|
| SCALE: | | UNIT: MM | |  | |
| TOLERANCE: | | .X ±0.15 .XX ±0.3 | | | |
| APP | James | 18-09-15 | TITLE: IC SOCKET 2.54mm | | REV. X3 |
| CHK | Huang | 01-05-13 | 2120 | | SHT 1 OF 1 |
| DRW | Arthur | 12-12-00 | | | |