
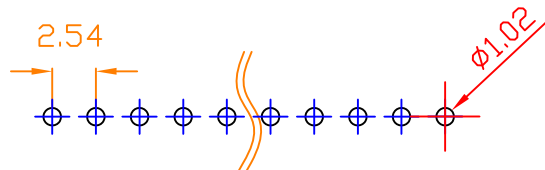

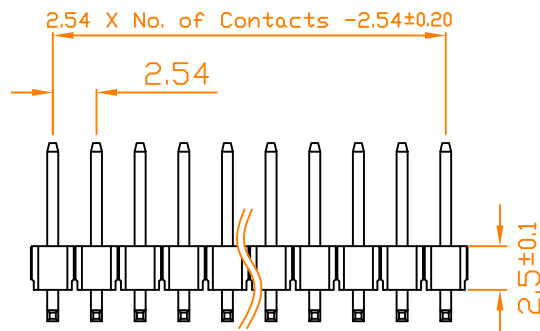


RoHS

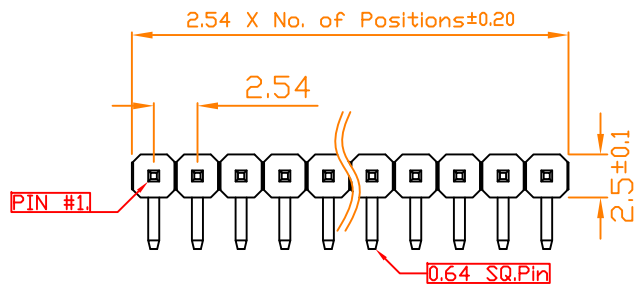

Recommended P.C.Board
Hole Layout

* Available in 1 through 40 circuits.

SPECIFICATIONS:

ELECTRICAL:

- Current Rating: 3 Amps.
- Insulator Resistance: 1000 Megohms min.
- Contact Resistance: 20 m ohms max.
- Dielectric Withstanding: AC 600V.

MATERIAL:

- Contact Material: Brass.
- Insulator Material: Polyester, UL 94V-0.
- Standard: P.B.T
- Finish: Gold
- Standard: Gold Flash All Over.

Operation Temperature: -40°C TO +105°C

Order Information

2130 - xx RE - 05

Serial No.
Single Row Type

No. of Pin Per Row

Terminal Type
R : Right Angle Type

Terminal Dim.
05:A:3.00 / B:3.62 / C:6.00

GENERAL TOLERANCE	單位 (UNIT)	料號 (PART NO.)	圖號 (DWG. NO.)	易昕企業有限公司 LEAMAX ENTERPRISE CO., LED.	
X . X ± 0.30	mm	2130-xxRE-05	2130-R05	名稱 (TITLE): Pin Header Pitch:2.54mm H2.5mm,Single Row, Right Angle Type	
X.X X ± 0.20					
X. X XX ± 0.10	審核 (APPROVAL)	核對 (CHECKED)	製圖 (DRAWN)	比 例 SCALE 2.5:1	張 數 SHEET 1/1
ANGLE ± 2 °	Chen 22-04-19	Huang 01-04-19	Chen 07-02-15	角法 PROJ.	更改 REV. A1