
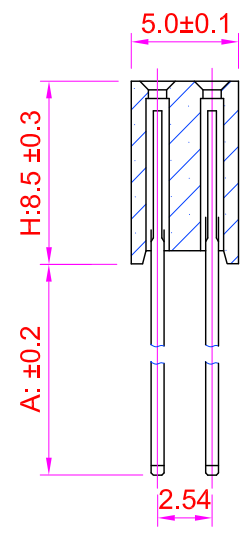
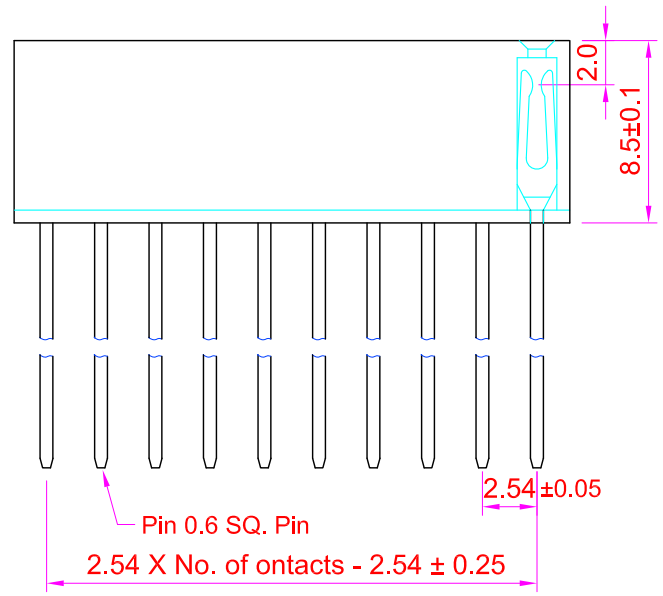
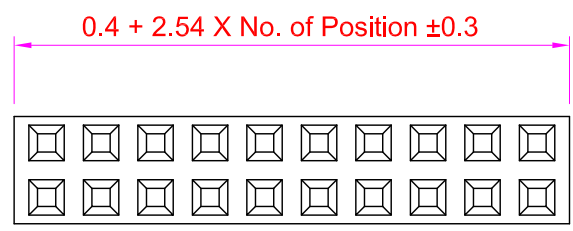


Rev	Modification	Date	Validate
-----	--------------	------	----------

Specifications

Current Rating : 3 Amps  
 Insulator Resistance : 1000 Megohms min.  
 Contact Resistance : 20 m ohms max.  
 Dielectric Withstanding : AC 600V  
 Operating Temperature : -40°C ~ +105°C  
 Contact Material : Brass  
 Insulator Material : Polyester, UL 94V-0 P.B.T.  
 Contact Plated : Standard:Full Gold Flash

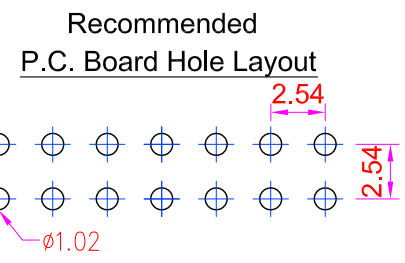

Order Information

**2 1 6 0 - A 6 - S 2 XX - 0EX GA**

Serial Type  
 Terminal Option  
 S : Straight Type  
 Row Type  
 2 : Dual Row  
 No. of Pin Per Row  
 Elevated Story Option  
 0EX : See Option  
 Contact Plating  
 GA : Gold Flash

Option

Elevated Story Option	H	A
0EA	8.50	9.92
0EB	8.50	10.30
0EC	8.50	4.84

GENERAL TOLERANCE		單位 (UNIT)	料號 (PART NO.)	圖號 (DWG NO.)
X. ± 0.50	X. ° ± 5°	mm	2160-A6	2160-A62
.X ± 0.20	.X ° ± 2°	審核 (APPROVAL)	核對 (CHECKED)	製圖 (DRAWN)
.X X ± 0.10	.X X ° ± 1°	James	Huang	Fen-Fen
DATE	20-06-11	23-01-15	05-01-15	20-06-11

名稱 (TITLE): Female Header P2.54mm  
 Elevated Story, Doul Row, Straight Type

