





RoHS

Rev	Modification	Date	Validate
-----	--------------	------	----------

Specifications

Current Rating : 3 Amps
 Insulator Resistance : 1000 Megohms min.
 Contact Resistance : 20 m ohms max.
 Dielectric Withstanding : AC 600V
 Operating Temperature : -40°C ~ +105°C
 Contact Material : Brass
 Insulator Material : Polyester, UL 94V-0 P.B.T.
 Contact Plated : Standard:Full Gold Flash

Recommended P.C. Board Hole Layout

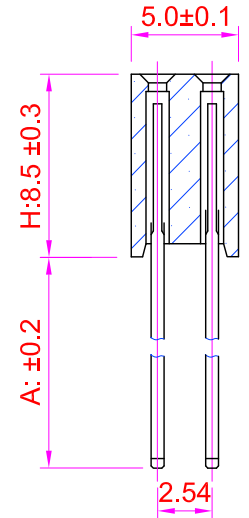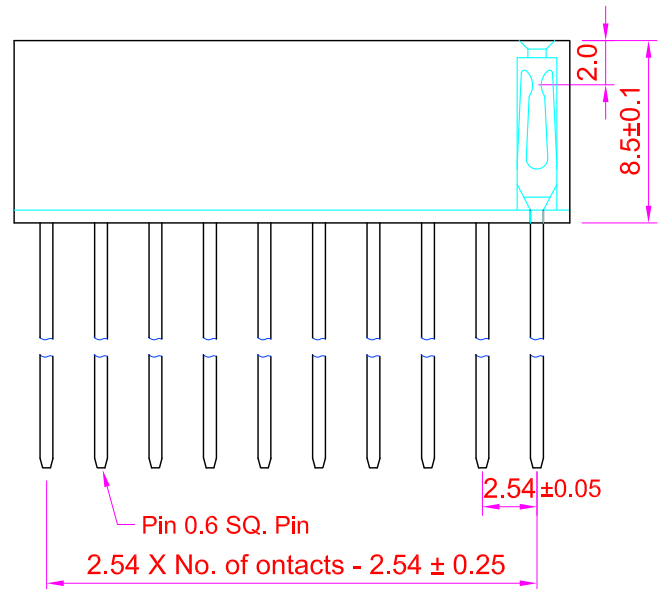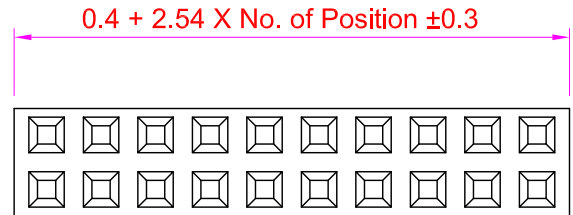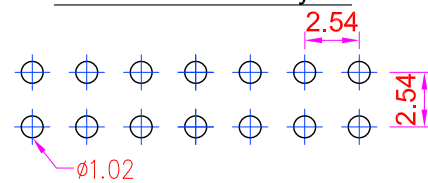

Order Information

2 1 6 0 - A 6 - S 2 XX - 0EX GA

Serial Type
 Terminal Option
 S : Straight Type
 Row Type
 2 : Dual Row
 No. of Pin Per Row
 Elevated Story Option
 0EX : See Option
 Contact Plating
 GA : Gold Flash

Option

Elevated Story Option	H	A
0EA	8.50	9.92
0EB	8.50	10.30
0EC	8.50	4.84

GENERAL TOLERANCE		單位 (UNIT)	料號 (PART NO.)	圖號 (DWG NO.)		
X. ± 0.50	X. ° ± 5°	mm	2160-A6-S2xx-0ExGA	2160-A62		
.X ± 0.20	.X ° ± 2°	審核 (APPROVAL)	核對 (CHECKED)	製圖 (DRAWN)	比例 (SCALE)	張數 (SHEET)
.X X ± 0.10	.X X ° ± 1°	James	Huang	Fen-Fen	3:1	1/1
DATE	20-06-11	23-01-15	05-01-15	20-06-11	商法 (PROJ.)	更改 (REV.)
					C	C
					名稱 (TITLE): Female Header P2.54mm Elevated Story, Doul Row, Straight Type	