



SPECIFICATIONS

- * Current Rating : 0.5 Amps
- * Insulator resistance: 5000 Megohms min.
- * Contacts resistance :20 m ohms max.
- * Dielectric withstanding: AC 500 V
- * Operating Temperature: -40°-+105°C
- * Contact Material: Phosphor bronze
- * Housing: NL-9T (UL 94 V-0)
- * Conact plating:Gold flash

ORDR INFORMATION

2161-1*xxSE

No.of Conacts
02 to 50 Conacts

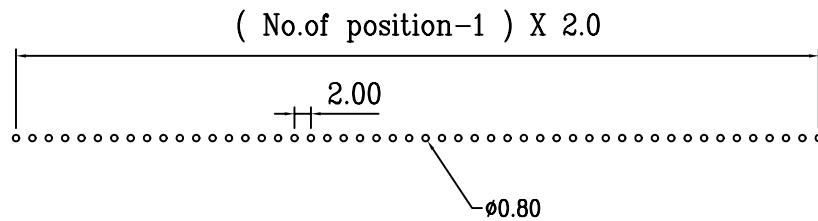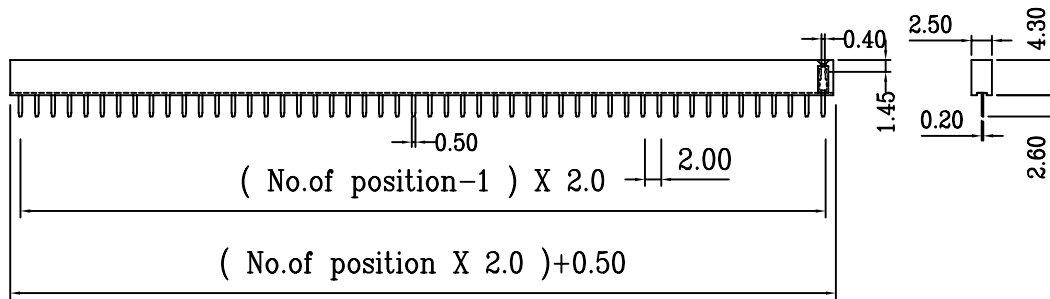

P.C.B.layout

				TOLERANCE				TITLE:				
				LINEAR	ANGLES			2.0mm Female Socket h=4.3mm type				
				X±0.50	X°±			PART NO. 2161-1*xxSE				
				.X±0.35	.X°±	APPD: JAMES	MAT'L: 28-12-11	DWG NO. 21611X XXGSE				
				.XX±0.25	.XX°±	CHKD: SHIRLEY	BADY: 28-12-11		UNITS	SCALE	SHEET	REV
REV	ECN NO.	NAME	DATE	.XXX±0.05	.XXX°±	DRWN: SHIRLEY	Q'TY: 28-12-11		MM		1 OF 1	D