

1234567




A

B

C

D

E

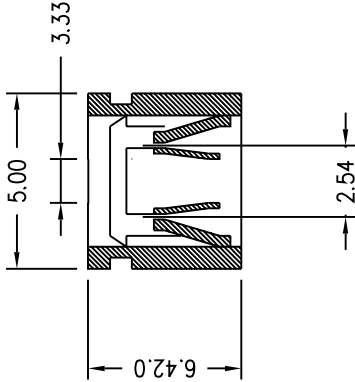

NOTES:

- 1.MATERIAL
- 1-1 Insulator:PBT 30% Glass Fiber UL-94V-0
- 1-2 Contact:Brass or Phosphor Bronze
- 1-3 Contact Plating:Glod Plated Over Nickel
- 2.SPECIFICATION
- 2-1 Current Rating:3 AMP
- 2-2 Dielectric Strength:500 V AC
- 2-3 Insulator Resistance:1000M ohms Min
- 2-4 Contact Resistance:20M ohms Min
- 2-5 Operation Temperature:-55°C to +85°C
- 2-6 Maximum Insertion Force:200~80g
- 2-7 Minimum Withdrawd Force:130~80g

CLOSE

|      |                                                                                     |                               |         |                                      |
|------|-------------------------------------------------------------------------------------|-------------------------------|---------|--------------------------------------|
| PROJ |  | SCALE : F<br>DO NOT SCALE DWG | MOLD NO | 2180-BAA                             |
| APP  |                                                                                     |                               | MODEL   | FILE NO<br>JUMPER<br>H6.0MM<br>CLOSE |
| CHK  | CCJ                                                                                 | 90.08.02                      |         | REV.<br>X1                           |
| DGN  | AMY                                                                                 | 90.08.02                      | UNIT    | SIZE<br>A4                           |
| DRW  | SHIEH                                                                               | 90.08.02                      | MM      | SHT 1 OF 1                           |

1234567