




A

B

C


D

E

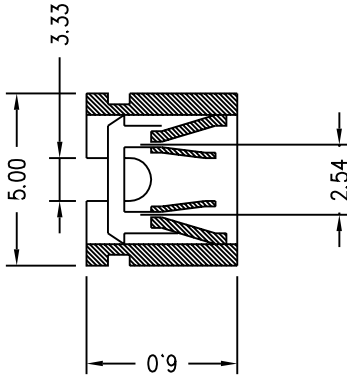

NOTES:

- 1.MATERIAL
1-1 Insulator:PBT 30% Glass Fiber UL-94V-0
1-2 Contact:Brass or Phosphor Bronze
1-3 Contact Plating:Glad Plated Over Nickel
2.SPECIFICATION
2-1 Current Rating:3 AMP
2-2 Dielectric Strength:500 V AC
2-3 Insulator Resistance:1000M ohms Min
2-4 Contact Resistance:20M ohms Min
2-5 Operation Temperature:-55°c to +85°C
2-6 Maximum Insertion Force:200~80g
2-7 Minimum Withdrawl Force:130~80g



SCALE : F
DO NOT SCALE DWG

MOLD NO 2180-BBA

APP	CHK	DGN	DRW	SHIEH	UNIT	MM	SHT 1 OF 1	SIZE	A4
92.03.07	90.08.02	90.08.02	90.08.02	90.08.02	90.08.02	90.08.02	90.08.02	90.08.02	90.08.02
CCJ	AMY	SHIEH	SHIEH	SHIEH	SHIEH	SHIEH	SHIEH	SHIEH	SHIEH
FILE NO	JUMPER OPEN H-6.0MM	REV. X1	REV. X1	REV. X1	REV. X1	REV. X1	REV. X1	REV. X1	REV. X1

1

2

3

4

5

6

7

1

2

3

4

5

6

7

A

B

C

D

E