



1 2 3 4 5 6 7

Specifications:


- * Current Rating: 3A
- * Insulation Resistance: 5000 Megohms min.
500V DC for 1 minutes.
- * Withstand Voltage: AC 500V for 1 minutes.
-40°C+105°C
- * Temperature Range: Phosphor Bronze.
- * Contact Material: Polyester, UL94V-0
- * Insulator Material: Standard: P.B.T.
- * Tolerance±0.2




OPEN





CLOSE




B Type



A Type

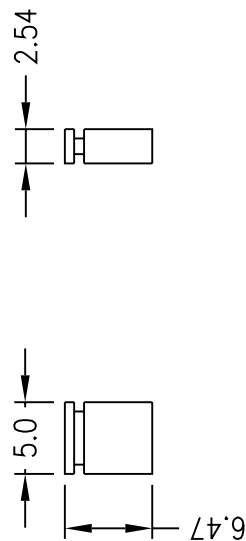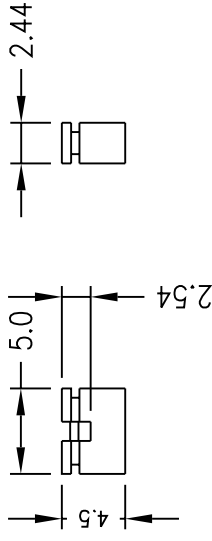

D Type

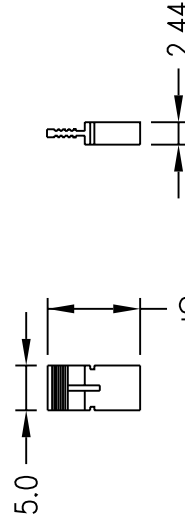

Application And Features:

- * Easiest way of programming by simply connecting contact points together.
- * Easy applied—No soldering.
- * All side stackable.
- * Low cost alternative to DIP switch.
- * Mate with 2.54mm grid male header connectors.

PROJ		SCALE : F	MOLD NO	2180
APP		DO NOT SCALE DWG		
CHK	CCJ	91.11.04	MODEL	FILE NO
DGN	AMY	89.11.01	P:2.54mm	MINI JUMPER
DRW	SHIEH	89.11.01	UNIT	MM
				SHT 1 OF 1
				SIZE
				A4
				REV. X1

A

B

C

D

E

A

B

C

D

E

1 2 3 4 5 6 7