



1 2 3 4 5 6 7


A A

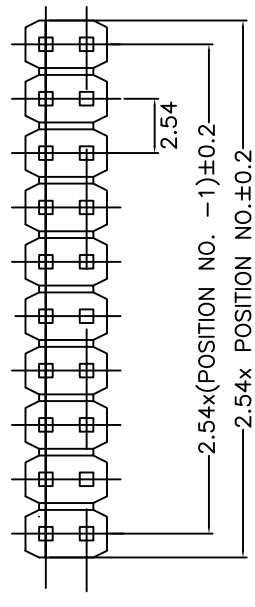

B B

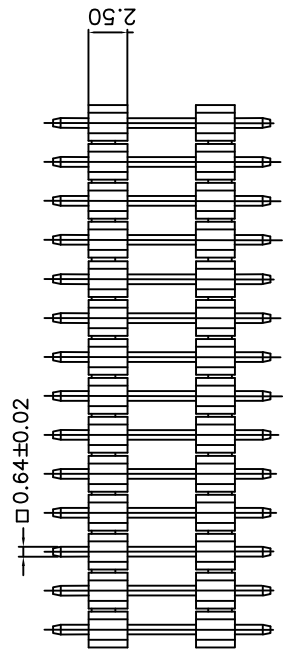

C C

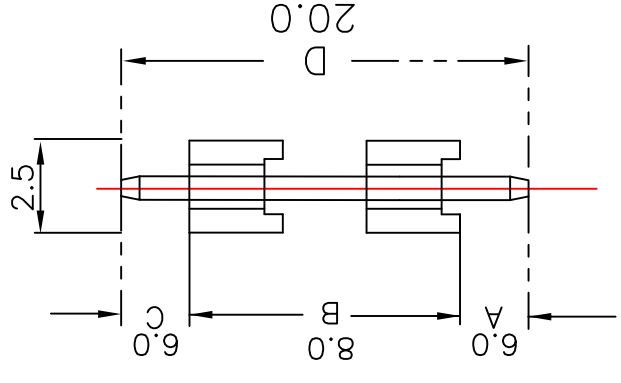

D D

Order Information

PART NO. 2131-2xxxSDE20
 Pitch 2.54 Dual Row
 No of Contacts 2~40
 RoHS
 PIN TYPE

Specifications:
 Insulator Material: PBT & 30% Glass Fiber(UL 94V-0)
 Contact Resistance: 20m ohms Max at DC 100mA
 Insulator Resistance: 1000M ohms Min at DC 500 V
 Current Rating: 1 Amps
 Dielectric Withstanding Voltage: AC 500V For 1 minute
 Temperature Rating: -40°C ~ + 85°C
 Contact Material: Phosphor Brass
 RoHS

E E

PROJ	SCALE : F DO NOT SCALE DWG	TITLE	
		James	Pitch 2.54 Dual Row Dual Housing Type
APP	15-10-14	DWG NO.	2131-SDA
CHK	01-10-14	UNIT	MM
DRW	03-01-12	SHT	1 OF 1
GENERAL TOLERANCE ± 0.20		REV.	X1
		SIZE	A4

1 2 3 4 5 6 7