


PCB LAYOUT/TOP VIEW

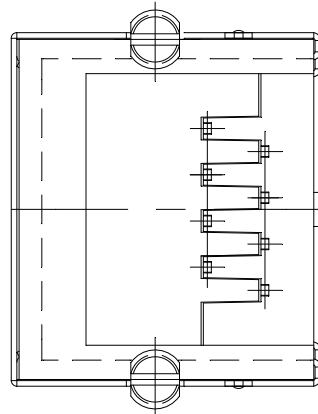

MATERIALS:

PLASTIC HOUSING: ENGINEERING THERMOPLASTIC
 FLAMMABILITY RATING UL 94V-0.
 COLOUR:BLACK.

PLASTIC INSERT: ENGINEERING THERMOPLASTIC
 FLAMMABILITY RATING UL 94V-0.
 COLOUR:GRAY(PANTONE No. COOL GRAY 5U).

CONTACTS: PHOSPHOR BRONZE

PLATING: GOLD PLATING OVER NICKEL IN CONTACT.

MATTED TIN PLATING OVER NICKEL IN SOLDER AREA.

SHIELD: BRASS PLATING NICKEL ALLOY.

P/N 3u" : 3008715501
 6u" : 3008715601
 15u" : 3008715701
 30u" : 3008715801
 50u" : 3008715901

RoHS COMPLIANT

設計 DR. Kathy Chung 2013/07/25	核准 APPD. Marco 2013/07/25	容許公差 .XXX ±0.10 .XX ±0.25 .X ±0.38 X ±0.50 ANG ±3°	TOLERANCE	品名 ARTICLE SIDE ENTRY PCB JACK(8P8C)
版本說明 REVISION NOTE		依E302-1307045新增3008715701規格,發D版		圖號 DWG NO. 3008715501
				單位 UNIT mm
				比例 SCALE 1/3
				張數 SHEET 1/1
				版本 REV. D