
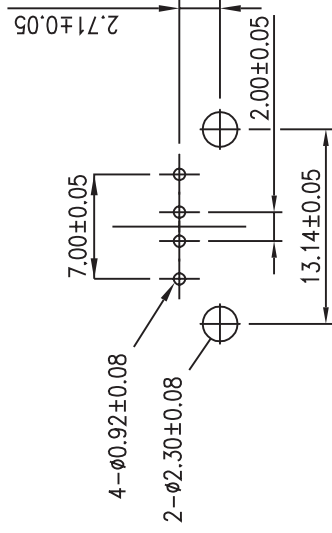



USB A TYPE,FEMALE SING DECK(RIGHT ANGLE,THRU-HOLE)



PC BOARD LAYOUT



ORDER INFORMATION

3210-W1BC

With
Back
Cover (at bottom)

Specification:

Housing: PBT+Glass Fiber, UL94V-0
Contact: Phosphor Bronze (0.25mm)
Shell: Phosphor Bronze (0.3mm)
Voltage Current Rating: 1A,30Vac
Insulation Resistance: 1000M Ω Min.
Contact Resistance: 30m Ω Max.
Dielectric Withstanding Voltage:
AC 500V for 1 minute
Temperature Rating: -55°C to +105°C

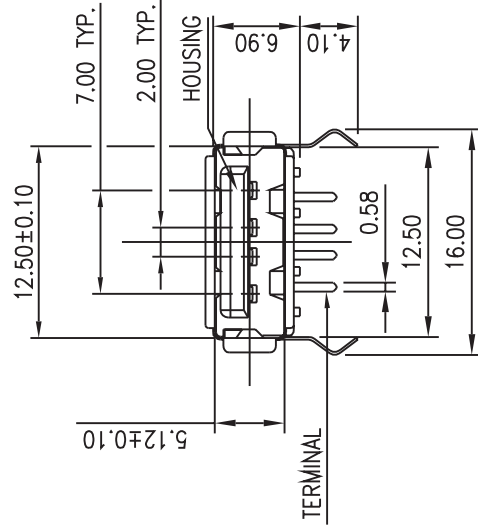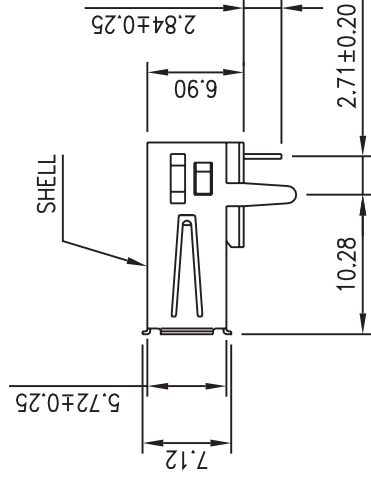

TERMINAL

HOUSING