Rating	Input:12V/24 DC Output:5V DC 2.4A+2.4A max.
Insulation Resistance	DC 500V 100MΩ Min.
Dielectric Strength	AC 1500V 1 minute
Operating Temperature	-20℃~45℃

Mounting Hole



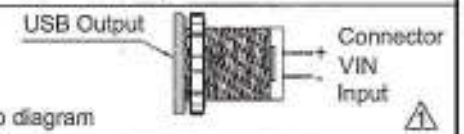

Loop diagram

⚠ 1.USB port version type: USB2.0
2.Terminal specification: 250" Quick terminal
3.Nut torque: 6.8Kgf · cm Min.
4.Vibration Test: X-Y-Z AXIX 5-55HZ 1mm(P-P)/1HRS

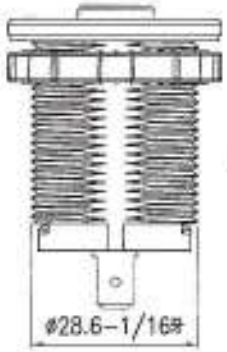

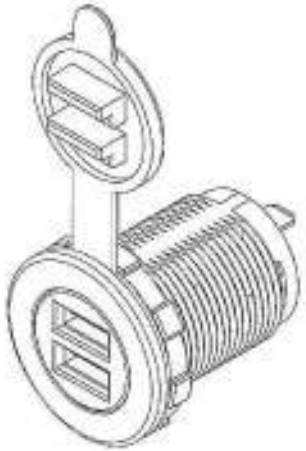

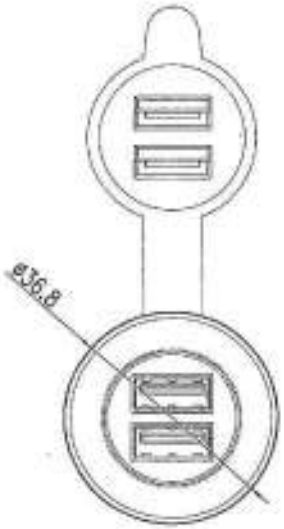

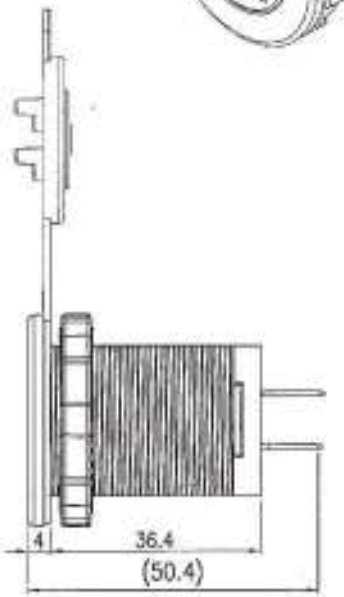

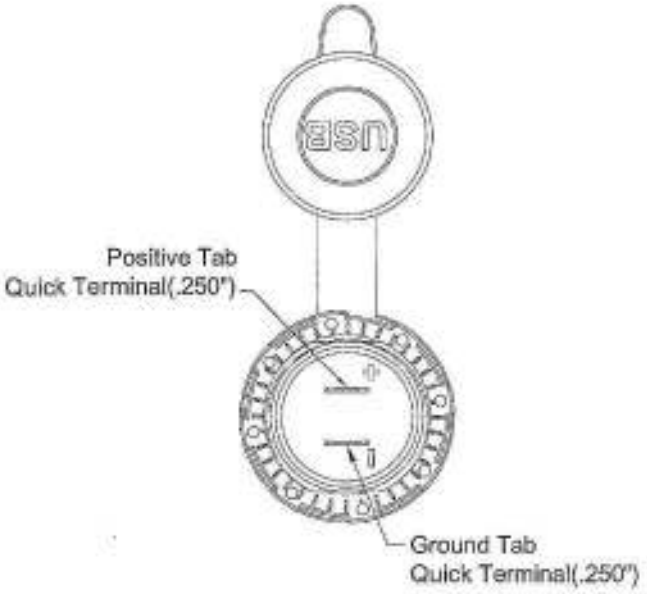

Tolerances ±0.3 Unless Otherwise Specified

			△	Drawn	Checked	Approved	SCI BOM No.	1251340	Model Name	Triple outlet socket	
04/20'17	曾敏捷	依SCI會簽要求增加說明與修改安裝孔	⚠	曾敏捷		Simon	Customer No.		Model No.	A13-194B2-BB3	Rev. X1
Date	Name	Description	No.	04/20'17		4/20-17	Unit	mm			