

Characters

- § Viewing angle 20°.
- § Reliable and Rugged
- § Standard 3mm diameter package.

ITEM	MATERIALS
Resin(Mold)	Epoxy
Lens Color	Water Transparent
Lead Frame	Ag Plating Iron Alloy
Dice	AlGaInP/GaAs

Absolute Maximum Ratings (Ta=25°C)

Item	Symbol	Value	Unit
		Yellow	
Power Dissipation	PD	80	mW
DC Forward Current	IF	20	mA
Pulsed Forward Current	IFP	100 *	mA
Reverse Voltage	VR	5 ▲	V
Operating Temperature	Topr	-25 ~ +80	°C
Storage Temperature	Tstg	-40 ~ +100	°C
Soldering Temperature Δ	Tsol	260	°C

- * Duty 1/10 Pulse Width 0.1ms ▲ This Rating is Zener Diode
- Δ At the position of 4mm from the bottom of the package within 5 seconds.

Electrical-Optical Characteristics (Ta=25°C)


Part No.	Luminous Intensity (mcd) ☆			Forward Voltage (V)			Forward Voltage (V)			Reverse Current (μ A)		Wavelength Characteristics (nm)			
	Typ.	Min.	IF (mA)	Typ.	Max.	IF (mA)	Min.	IF (μ A)	Max.	VR (V)	λ D Typ.	λ D Max.	$\Delta \lambda$ Typ.	IF (mA)	
BL304Y2CA2A01	1300	1000	20	1.9	2.4	20	1.3	100	50	5	590	595 ◆	20	20	

- ☆ Axial Direction (luminous Intensity) ◆ Products are sorted by wavelength, which cannot be specified by customer.


Notes:

- § All dimensions are in millimeters (inches).
- § Tolerance is ± 0.25 (.010) mm unless otherwise noted.
- § Protruded resin under flange is 1.0 mm (.04) max.
- § Lead spacing is measured where the leads emerge from the package.

Outline Dimensions

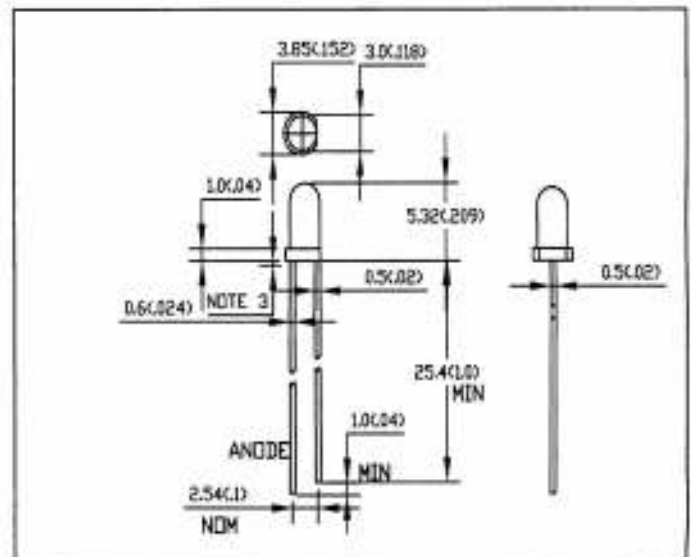

Directive Characteristics (Ta=25°C)

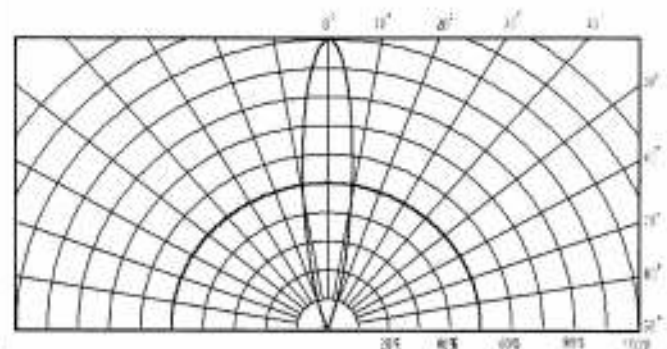


Relative Luminous Intensity


Typical Characteristics

The data typical, and the value is not guaranteed.


IF-VF(Ta=25°C)

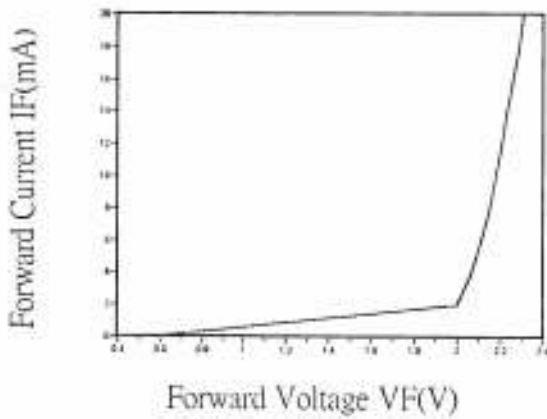


Relative Luminous Intensity-IF
(Ta=25°C)

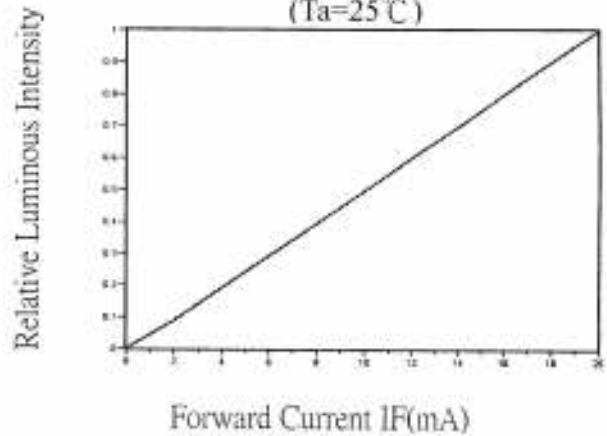


Wavelength Characteristics
(Ta=25°C)

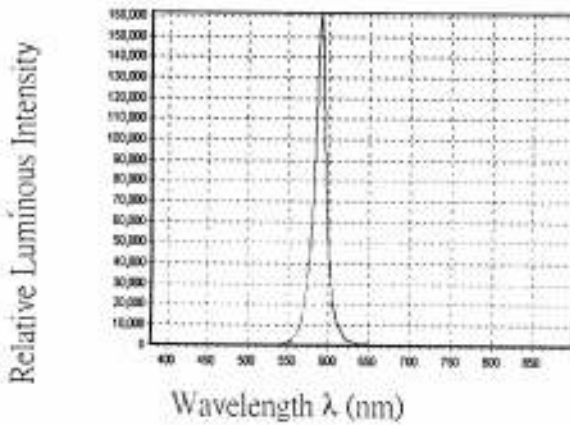

Relative Luminous Intensity-Ta

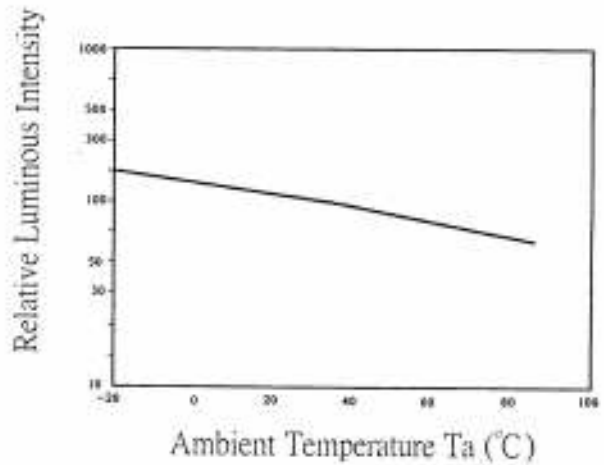

IF-Ta

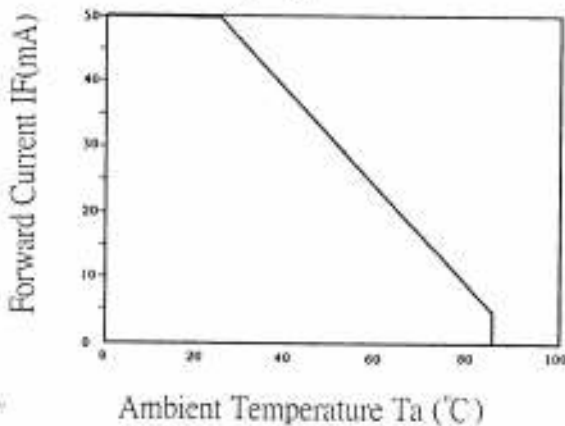

θ - λ(Ta=25°C)

