

## ● SPECIFICATIONS

### MECHANICAL

**Mechanical Life:** 1000 operation cycles per switch.

**Operation Force:** 500gf max.

**Operation Temp:** -40°C to 85°C

### ELECTRICAL

**Electrical Life:** 1000 operation cycles per switch 24VDC,25mA

**Non-Switching Rating:** 100mA,50VDC

**Contact Resistance:** 100mΩ max.at Initial.

**Insulation Resistance:** 100MΩ min (at 500VDC)


**Dielectric Strength:** 300VAC/1 minute

**Capacitance:** 5pf max.



### DHN

DHN - 10	10	13.93[.548]
DHN - 8	8	11.39[.448]
DHN - 6	6	8.85[.348]
DHN - 4	4	6.31[.248]
DHN - 2	2	3.77[.148]
PROD.NO	No.of. POS	DIM A

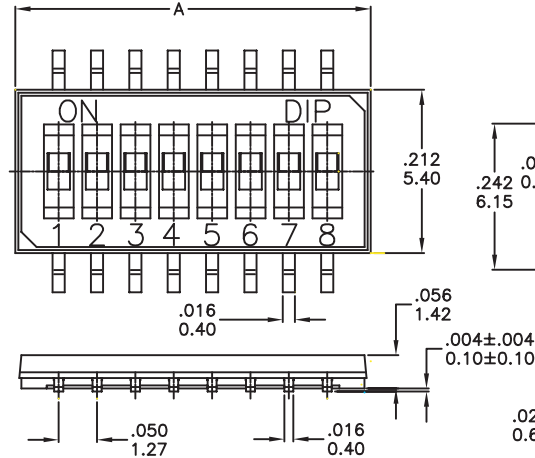

### P.C.MOUNTING

