


UNC #4-40×3.3mm
(THREAD)



UNC #4-40 Hexscrew




HGCF 15M/F GENDER CHANGER

PIN OUT: 15Male

15Female

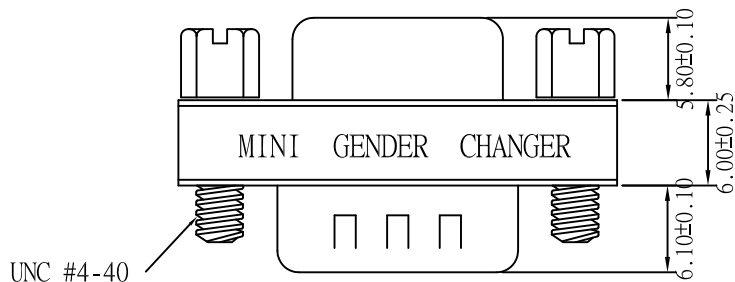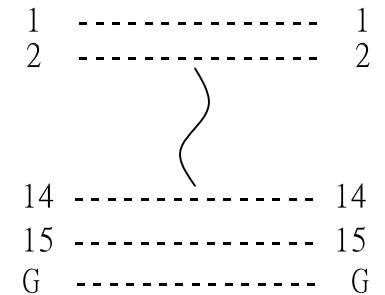

UNC #4-40

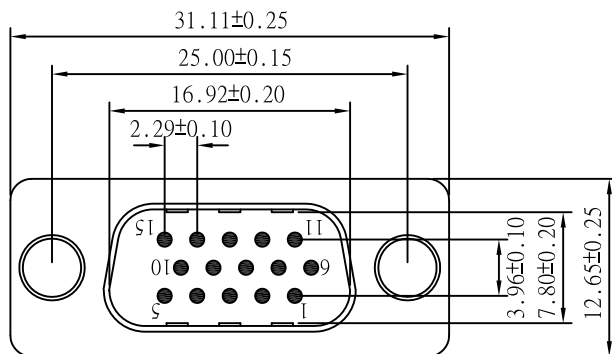

ELECTRICAL TEST:

1. 100% Test (Open, short, miss wire)
2. Contact Resistance: 5 ohm max.
3. Insulation Resistance: 20M ohm min.
4. Hi-pot: 300V DC/0.5mA

Label: yellow color with black character

One side: MINI GENDER CHANGER

The other side: U.S.A. PATENT 5199906 GENDER CHANGER

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 V0

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin plated shell

RoHS Compliant

TOLERANCES ARE

DRAWING BY CY

X.±

CHECKED BY GENIUS

.X±

UNIT / mm

SCALE 1 : 1

.XXX±

DATE

ANG±

SIZE A4

P PROJECTION



ORDER INFORMATION

HDX2-ES-1515-LF

SERIES

LEADFREE
15 MALE / 15 FEMALE

SLIM

MALE TO FEMALE

DESCRIPTION: