
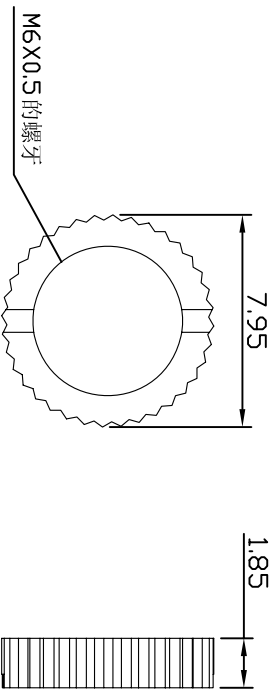



ECON NO.	REV	MODIFICATION	DATE	DRAW	APPROVE
	A1	NEW ISSUES	2009.07.02	JULY	ALAN

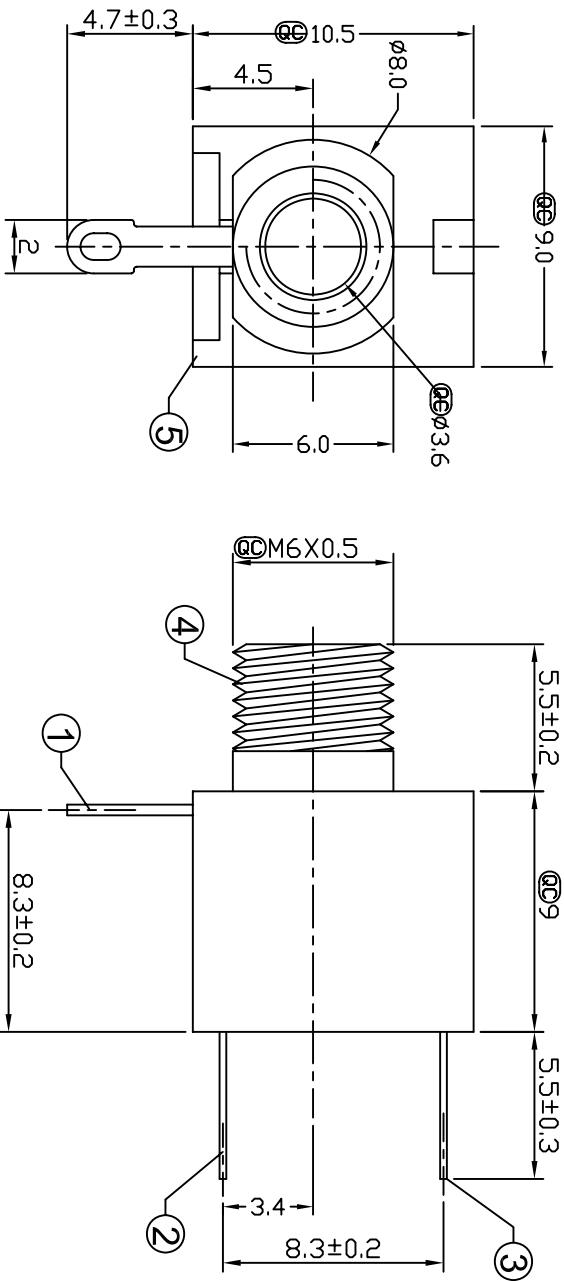

- SPECIFICATION**
1. Rating : DC 30V 0.5A;
 2. Contact resistance: $\leq 0.03\Omega$;
 3. Insulation resistance: $\geq 100M\Omega$ (DC250V) ;
 4. Withstand voltage: 500VAC ;
 5. Insertion and extraction force: 3-20N;
 6. life test: 5,000 cycles.

LEAD FREE

NO	DESCRIPTION	QTY	MATERIAL	REMARK
5	HOUSING	1	PBT	UL-94VO(BLACK)
4	AXIS SUPPORT	1	H59 BRASS	Sn-Plating
3	SPRING PIECE	1	PHOSPHOR BRONZE	Ag-Plating
2	CURVE PIECE	1	H62 BRASS	Ag-Plating
1	FLAT PIECE	1	H62 BRASS	Ag-Plating

DIMENSION IN mm [Inch]		DWG NO.		FILE NO.		HLA-3501D11
TOLERANCE UNLESS OTHERWISE SPECIFIED		HLA-3501D11				
X ±0.5	X ± 3°					
XX ±0.3	XX ± 2°					
XXX ±0.25						
APPROVE		DRAW		PRTL		SHEET 1 / 1
JACK	CHECK	JULY	SCALE	1:1	REV	A1

F
E
D
C
B
A

1 2 3 4 5 6 7 8