


Characters

- § High intensity.
- § Viewing angle 15°.
- § Reliable and Rugged
- § Standard 5mm diameter package.

Outline Dimensions

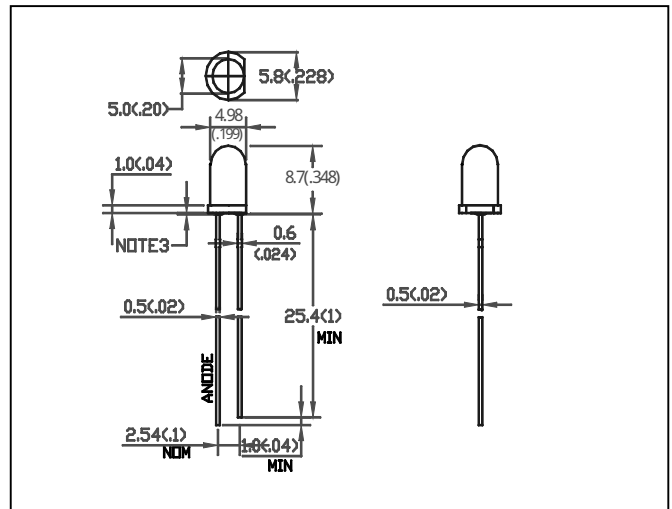


ITEM	MATERIALS
Resin(Mold)	Epoxy
Lens Color	Water Transparent
Lead Frame	Ag Plating Iron Alloy
Dice	InGaN

Absolute Maximum Ratings (Ta=25°C)

Item	Symbol	Value	Unit
		White	
Power Dissipation	PD	120	mW
DC Forward Current	IF	20	mA
Pulsed Forward Current	IFP	100 *	mA
Reverse Voltage	VR	5 ^	V
Operating Temperature	Topr	-25 ~ +80	°C
Storage Temperature	Tstg	-40 ~ +100	°C
Soldering Temperature [△]	Tsol	260	°C

Directive Characteristics (Ta=25°C)

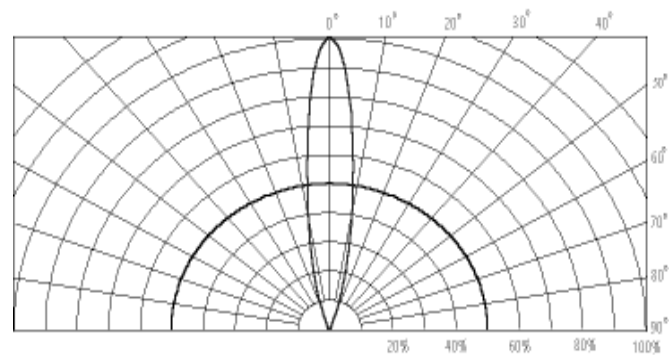

* Duty 1/10 Pulse Width 0.1ms This Rating is Zener Diode
 △ At the position of 4mm from the bottom of the package within 5 seconds.

Electrical-Optical Characteristics (Ta=25°C)

Relative Luminous Intensity

Part No.	Luminous Intensity (mcd) ☆			Forward Voltage (V)			Forward Voltage (V)		Reverse Current (μA)		Wavelength Characteristics		
	Typ.	Min.	IF (mA)	Typ.	Max.	IF (mA)	Min.	IF (μA)	Max.	VR (V)	X	Y	IF (mA)
LA504W3CA-3B/01	13000	10000	20	3.2	4.0	20	2.0	100	50	5	0.2662	0.2411	20

☆ Axial Direction (luminous Intensity)

Notes:

- § All dimensions are in millimeters (inches) .
- § Tolerance is ±0.25 (.010) mm unless otherwise noted.
- § Protruded resin under flange is 1.0 mm (.04) max.