
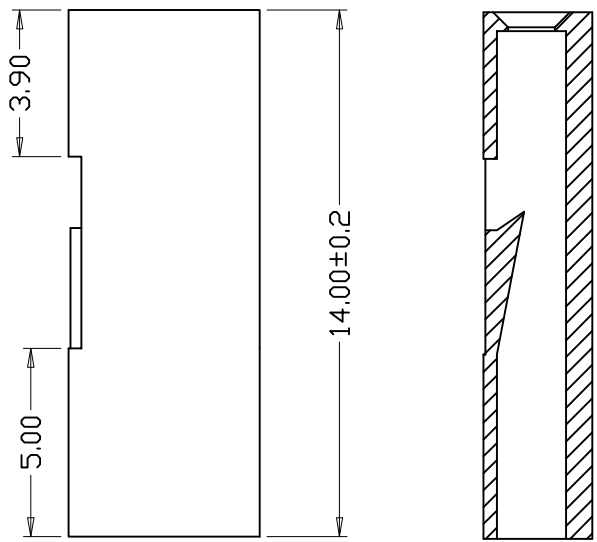


SPECIFICATIONS:
 Voltage rating: 250V AC, DC
 Current rating: 3A AC, DC
 Withstanding Voltage: 1000V AC/minute
 Insulation resistance: 1000MΩ/min
 Temperature range: -25 C +85 C
 Contact resistance: Initial value/10mΩ max
 After environmental testing/20mΩ max

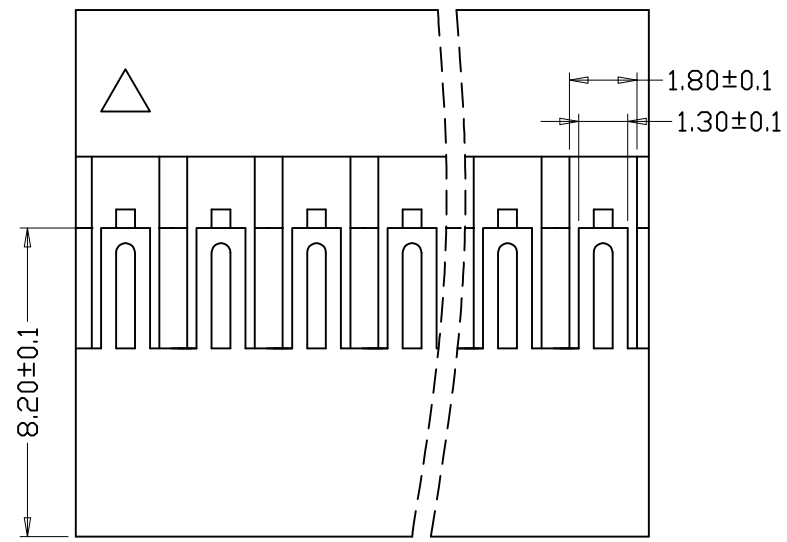

| Part NO. | DimenBion |
|----------|-----------|
| | A (MM) |
| 1P | 2.54 |
| 2P | 5.08 |
| 3P | 7.62 |
| 4P | 10.16 |
| 5P | 12.7 |
| 6P | 15.24 |
| 7P | 17.78 |
| 8P | 20.32 |
| 9P | 22.86 |
| 10P | 25.4 |
| 11P | 27.94 |
| 12P | 30.48 |
| 13P | 33.02 |
| 14P | 35.56 |
| 15P | 38.10 |
| 16P | 40.64 |
| 17P | 43.18 |
| 18P | 45.72 |
| 19P | 48.26 |
| 20P | 50.80 |

ZL2543-1PS

NOTES:
PART NO.:
Material: <1>HIGH TEMP. PLASTIC UL 94V-0

| | | | |
|------------------|------------|---------------------|-------------------|
| | | | |
| | | | |
| | | | |
| 日期版次 REVISION | 日期 DATE | 变更内容 DESCRIPTION | 核 准 APPROVALBY |

| | | | | | |
|------------|------------|---------|----------------|---------------------------|--|
| 料号PART NO: | | | | 一般公差 GENERAL TOLERANCE | |
| 品名 TITLE: | | | | X.X ±0.15 | |
| 材料: PPO | | | | X.XX ±0.05 | |
| 单位: MM | 包装规格: 1K/包 | 比例: 1:1 | ANGLE ±1° | | |
| 制图: LI | 审核: LI | 核准: LI | 日期: 2010/02/22 | | |